




Automatic Side Seal Models

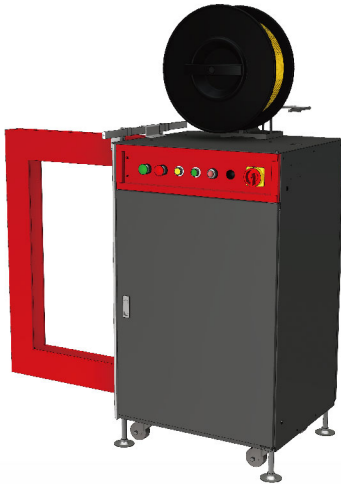

PW-0860YS2

Options
· Detection for strap not in position
· Detection for no strap
· Stainless steel structure SUS #304
· Conveyor system (custom made)
· Sensor for 2 straps
· No power roller
· Single phase (1Ø)



PW-0860CYS2

PW-0860YS2/ PW-0860CYS2 Automatic Strapping Machine

Y: Side Seal + 2 Sensors with Steel Arch

CY: Side Seal + 2 Sensors with Aluminum Arch

Power	3Ø, 220/380/415/440V, 50/60Hz
Standard Arch Size	W 600 x H 850 mm (other sizes made on request)
Strap Width	9, 12, 15,19 mm (PET option)
Strapping Tension	0 ~ 70 Kgs
Strapping Speed	2.4 sec./strap (25 strap/min.)
Sealing point	692 mm from the floor
Machine Size	L 1425 x W 630 x H 1724 mm



PW-0660YTR

Options
· Detection for strap not in position
· Detection for no strap
· Stainless steel structure SUS #304
· Single phase (1Ø)



PW-0660CYTR

PW-0660YTR/ PW-0660CYTR Automatic Strapping Machine

YTR: Side Seal Include Free Roller Conveyor with Steel Arch

CYTR: Side Seal Include Free Roller Conveyor with Aluminum Arch

Power	3Ø, 220/380/415/440V, 50/60Hz
Standard Arch Size	W 600 x H 650 mm (other sizes made on request)
Strap Width	9, 12, 15,19 mm (PET option)
Strapping Tension	0 ~ 70 Kgs
Strapping Speed	2.4 sec./strap (25 strap/min.)
Sealing point	692 mm from the floor
Machine Size	L 1425 x W 631 x H 1727 mm