



PW-2862UYAO Vertical Palletizing Strapping Machine

UYAO: High Speed Strapping Head for Side Sealing

Power	3Ø, 220/380/415/440V, 50/60Hz
Arch Size	W 1000x H 1250 mm (other sizes made on request)
PET Strap Width	9, 12, 15, 19 mm x 406 (ID)
Strapping Tension	40 ~ 400 Kgs (according to PET width)
Strapping Speed	15 sec./strap. (Exclude Convey Time)
Sealing Method	Electric Heat Seal
Air	6 KGf/CM ²
Head Moving Interval	250mm (other sizes made on request)
Detection	Detection for strap not in position Detection for no strap Detection for strap failure
Min. Conveyor Height	250 mm
Machine Size	L3079xW781xH1971 mm

Features

- Pneumatic driven lance
- Tension pool with no strap detection
- Strap Feed & Reverse :
Servo motor controlled
- U Series strapping tension force up to 400 kgs (base on 19mm PET)

Options


- Conveyor system
- Custom Made
- Fixed Arch

PP strap adjustable tension

- 40~130 Kgs (9mm)
- 40~180 Kgs (12mm)
- 40~240 Kgs (15mm)
- 40~260 Kgs (15mm)

PP strap adjustable tension

- 40~200 Kgs (9mm)
- 40~250 Kgs (12mm)
- 40~350 Kgs (15mm)
- 40~400 Kgs (19mm)

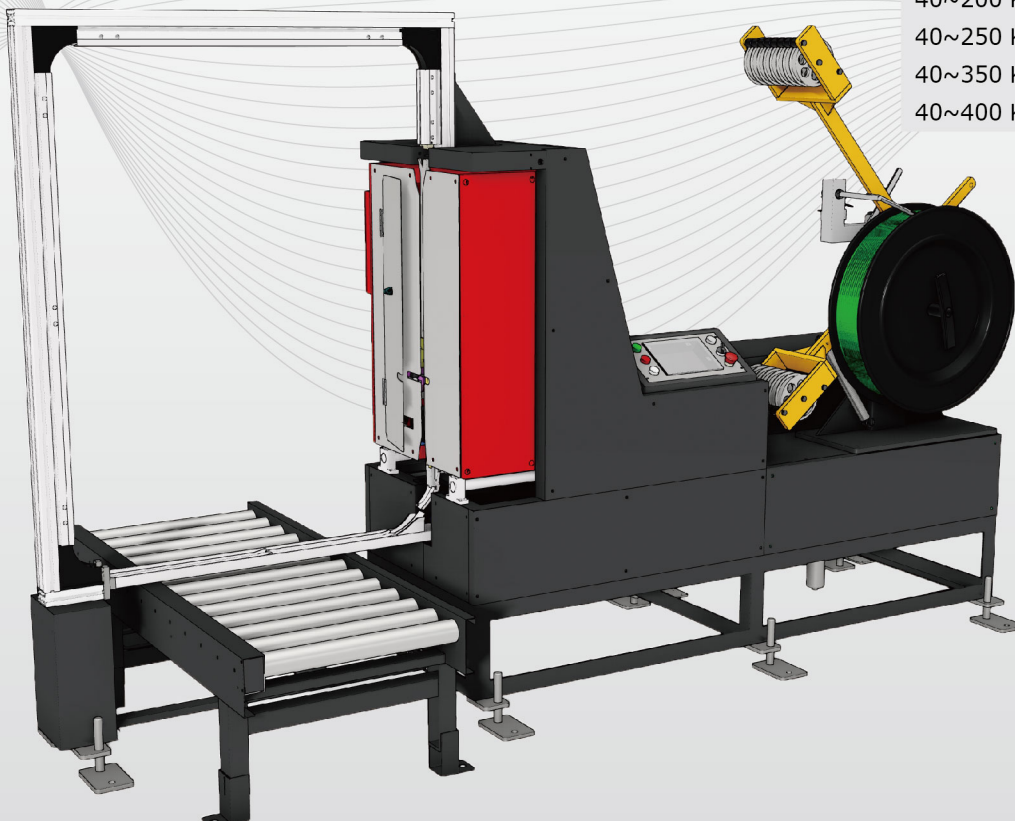

PW-2862UYAO