



U-Series Pallet Strapping Models - Low Profile Fixed Arch

PW-4863UYAOL Vertical Palletizing Strapping Machine-Low Profile

UYAOL:High Speeded Strapping Head for Side Sealing

Power	3Ø, 220/380/415/440V, 50/60Hz
Arch	W 1650 x H 1200 mm (other sizes made on request)
PET Strap Width	9, 12, 15, 19 mm x 406 (ID)
Strapping Tension	40 ~ 400 Kgs (according to PET width)
Strapping Speed	16 sec./strap. (Exclude Convey Time)
Sealing Method	Electric Heat Seal
Head Moving Interval	250mm (other sizes made on request)
Detection	Detection for strap not in position Detection for no strap Detection for straping failure
Min. Conveyor Height	150 mm
Machine Size	L 3510 x W 830 x H 2010 mm

Features

- Strapping head move:Motor driven
- Lance Move:Motor driven
- Tension pool with no strap detection
- Strap feed & reverse:
Servo motor controlled
- U Series strapping tension force up to 400 kgs (base on 19mm PET)

Options


- Conveyor system
- Custom made

PP strap adustable tension

- 40~130 Kgs (9mm)
- 40~180 Kgs (12mm)
- 40~240 Kgs (15mm)
- 40~260 Kgs (19mm)

PET strap adustable tension

- 40~200 Kgs (9mm)
- 40~250 Kgs (12mm)
- 40~350 Kgs (15mm)
- 40~400 Kgs (19mm)

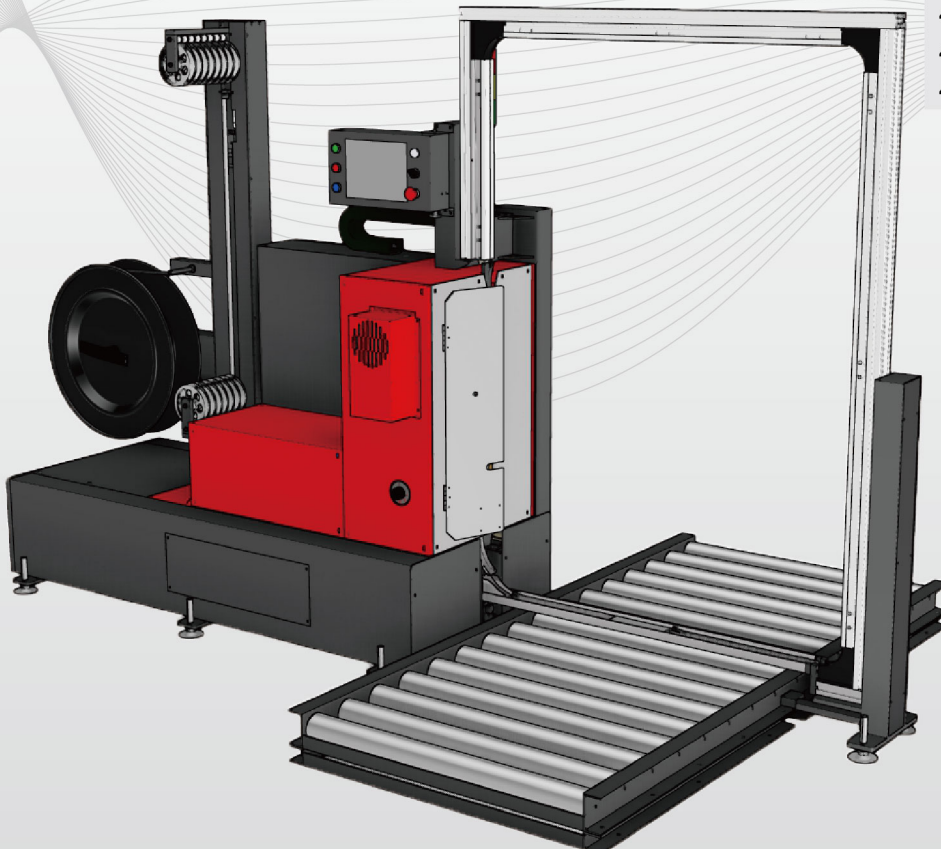

PW-4863UYAOL