



U-Series Pallet Strapping Models

PW-2862UYAOV Vertical Palletizing Strapping Machine

UYAOV: High Speed Strapping Head for Top Sealing

Power	3Ø, 220/380/415/440V, 50/60Hz
Arch Size	W 1250 x H 1000 mm (other sizes made on request)
PET Strap Width	9, 12, 15, 19 mm x 406 (ID)
Strapping Tension	40 ~ 400 Kgs (according to PET width)
Strapping Speed	10 sec./strap. (Exclude Convey Time)
Sealing Method	Electric Heat Seal
Air	6 KGf/CM ²
Min. Strapping Height	370 mm (with pallet)
Detection	Detection for strap not in position Detection for no strap Detection for strap failure
Min. Conveyor Height	500 mm
Machine Size	L3236xW1000xH2571 mm

Features

- Pneumatic driven lance
- Height memory function
- Tension pool with no strap detection
- Strap Feed & Reverse : Servo motor controlled
- U Series strapping tension force up to 400 kgs (base on 19mm PET)

Options


- Conveyor system
- Custom Made
- Fixed Arch

PP strap adustable tension

- 40~130 Kgs (9mm)
- 40~180 Kgs (12mm)
- 40~240 Kgs (15mm)
- 40~260 Kgs (19mm)

PET strap adustable tension

- 40~200 Kgs (9mm)
- 40~250 Kgs (12mm)
- 40~350 Kgs (15mm)
- 40~400 Kgs (19mm)

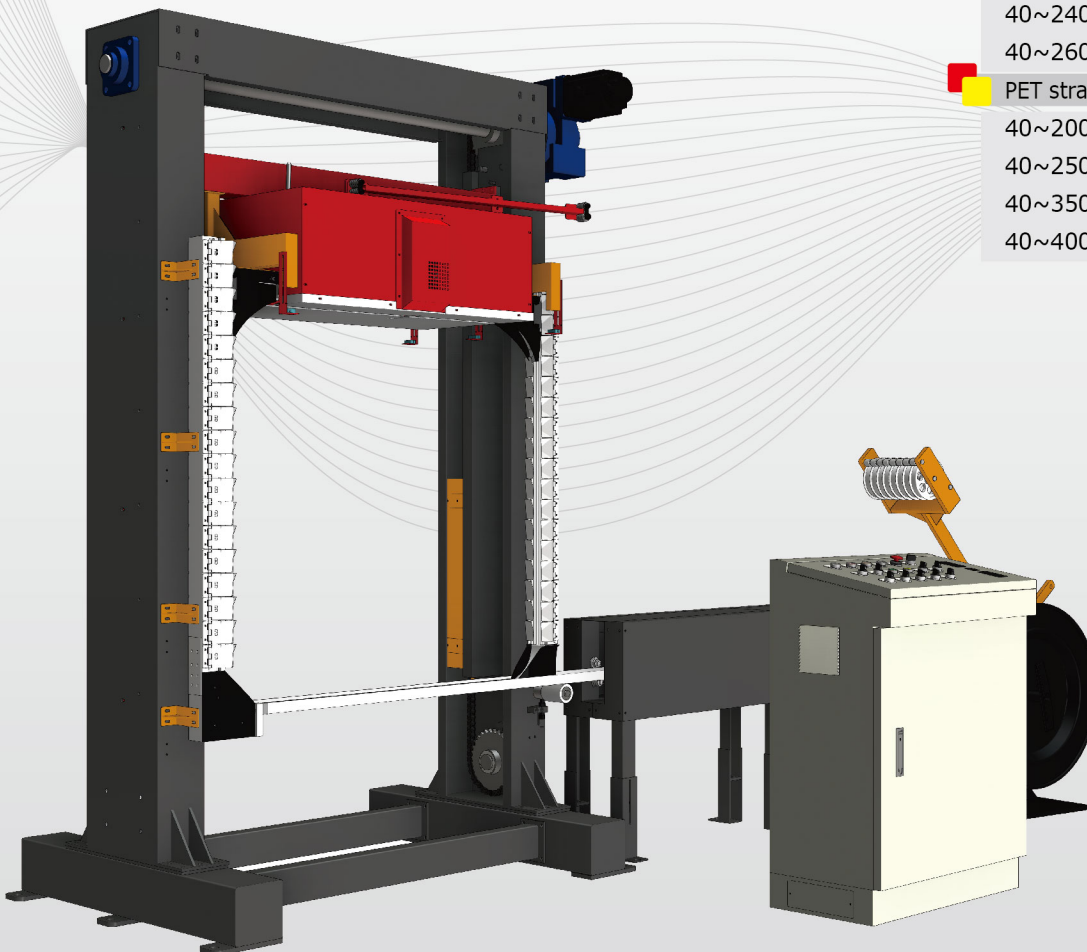

PW-2862UYAOV