

PW-2862UYAOP Vertical Palletizing Strapping Machine

UYAOP: High Speed Strapping Head for Top Sealing with Press

Power	3Ø, 220/380/415/440V, 50/60Hz
Arch Size	W 1250 x H 1000 mm (other sizes made on request)
PET Strap Width	9, 12, 15, 19 mm x 406 (ID)
Strapping Tension	40 ~ 400 Kgs (according to PET width)
Strapping Speed	30 sec./strap. (Exclude Convey Time)
Sealing Method	Electric Heat Seal
Air	6 KGf/CM ²
Top Press Power	1000 Kgs
Detection	Detection for strap not in position Detection for no strap Detection for strap failure
Min. Conveyor Height	400 mm
Machine Size	L3154xW1000xH2194 mm

Features

- Pneumatic driven lance
- Height memory function
- Tension pool with no strap detection
- Strap Feed & Reverse :
Servo motor controlled
- U Series strapping tension force up to 400 kgs (base on 19mm PET)

Options


- Conveyor system
- Custom Made
- Fixed Arch

PP strap adustable tension

- 40~130 Kgs (9mm)
- 40~180 Kgs (12mm)
- 40~240 Kgs (15mm)
- 40~260 Kgs (19mm)

PET strap adustable tension

- 40~200 Kgs (9mm)
- 40~250 Kgs (12mm)
- 40~350 Kgs (15mm)
- 40~400 Kgs (19mm)

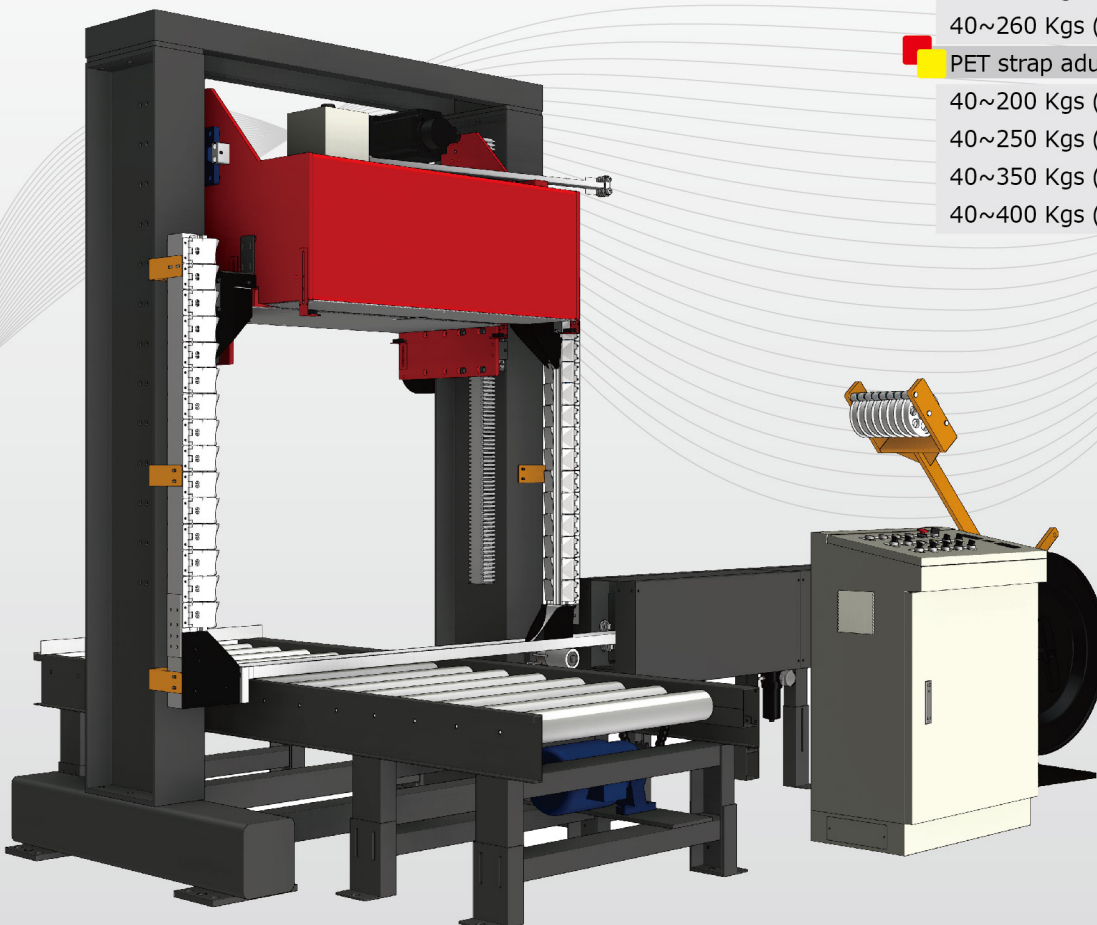

PW-2862UYAOP