



U-Series Pallet Strapping Models - Fixed Arch

PW-4874UYAV Vertical Palletizing Strapping Machine

UYAV: High Speed Strapping Head for Top Sealing


Power	3Ø, 220/380/415/440V, 50/60Hz
Standard Arch Size	W 1650 x H 1500 mm (other sizes made on request)
PET Strap Width	9, 12, 15, 19 mm x 406 (ID)
Strapping Tension	40 ~ 400 Kgs (according to PET width)
Strapping Speed	10 sec./strap. (Exclude Convey Time)
Sealing Method	Electric Heat Seal
Detection	Detection for strap not in position Detection for no strap Detection for strapping failure
Min. Conveyor Height	500 mm
Machine Size	L 3100 x W 1770 x H 2912 mm

Features

- Height memory function
- Tension pool with no strap detection
- Strap feed & reverse:
Servo motor controlled
- U Series strapping tension force up to 400 kgs (base on 19mm PET)

Options

- Conveyor system
- Custom Made

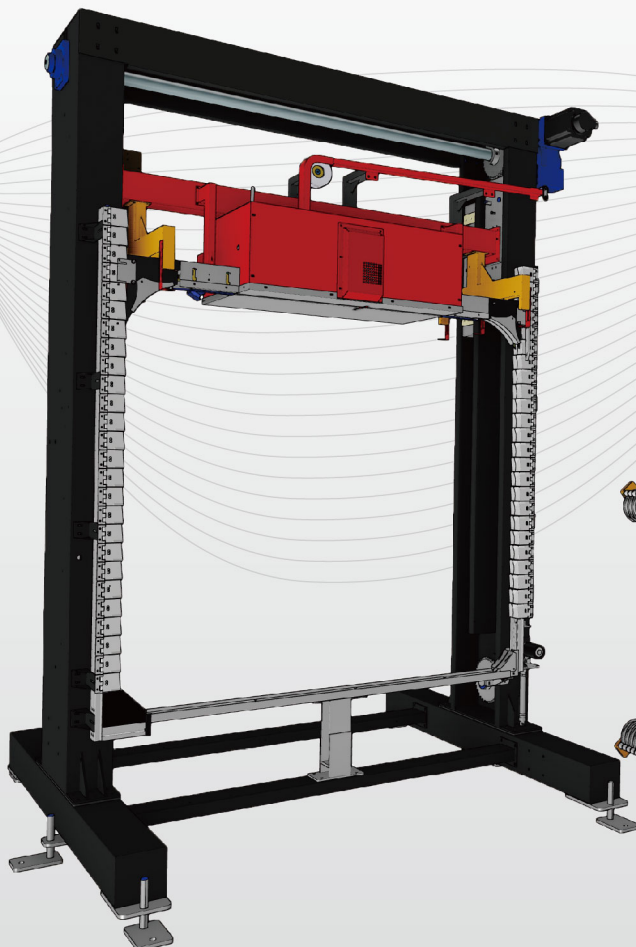


PP strap adjustable tension

- 40~130 Kgs (9mm)
- 40~180 Kgs (12mm)
- 40~240 Kgs (15mm)
- 40~260 Kgs (19mm)

PET strap adjustable tension

- 40~200 Kgs (9mm)
- 40~250 Kgs (12mm)
- 40~350 Kgs (15mm)
- 40~400 Kgs (19mm)

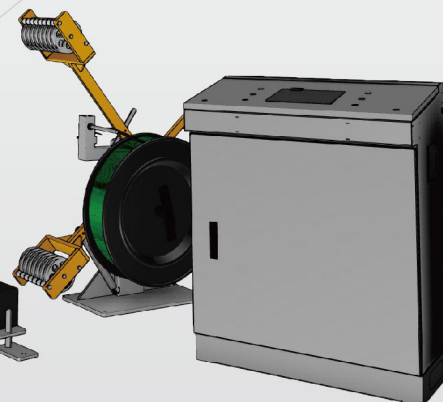

PW-4874UYAV