



PW-3864YAO Vertical Palletizing Strapping Machine

YAO: Strapping Head for Side Sealing


Power	3Ø, 220/380/415/440V, 50/60Hz
Arch Size	W 1400 x H 1450 mm (other sizes made on request)
PP Strap Width	12, 15, 19 mm
PET Strap Width	9, 12, 15, 19 mm x 406(ID)
Strapping Tension	0 ~ 70 Kgs
Strapping Speed	25 sec./strap. (Exclude Convey Time)
Sealing Method	Electric Heat Seal
Air	6 Kgf/cm ² (lance with electronic driven)
Head Moving Interval	250mm (other sizes made on request)
Detection	Detection for strap not in position Detection for no strap Detection for strap failure
Min. Conveyor Height	300 mm
Machine Size	L 4308 x W 1650 x H 2967 mm

Features

- Lance move : Electric
- Strapping head move : Electric
- Automatic strapping, cutting and welding

Options

- Top press mechanism (PW-3864YAOP)
- Strapping tension of 100 Kgs
- Conveyor system
- Custom Made
- Fixed Arch

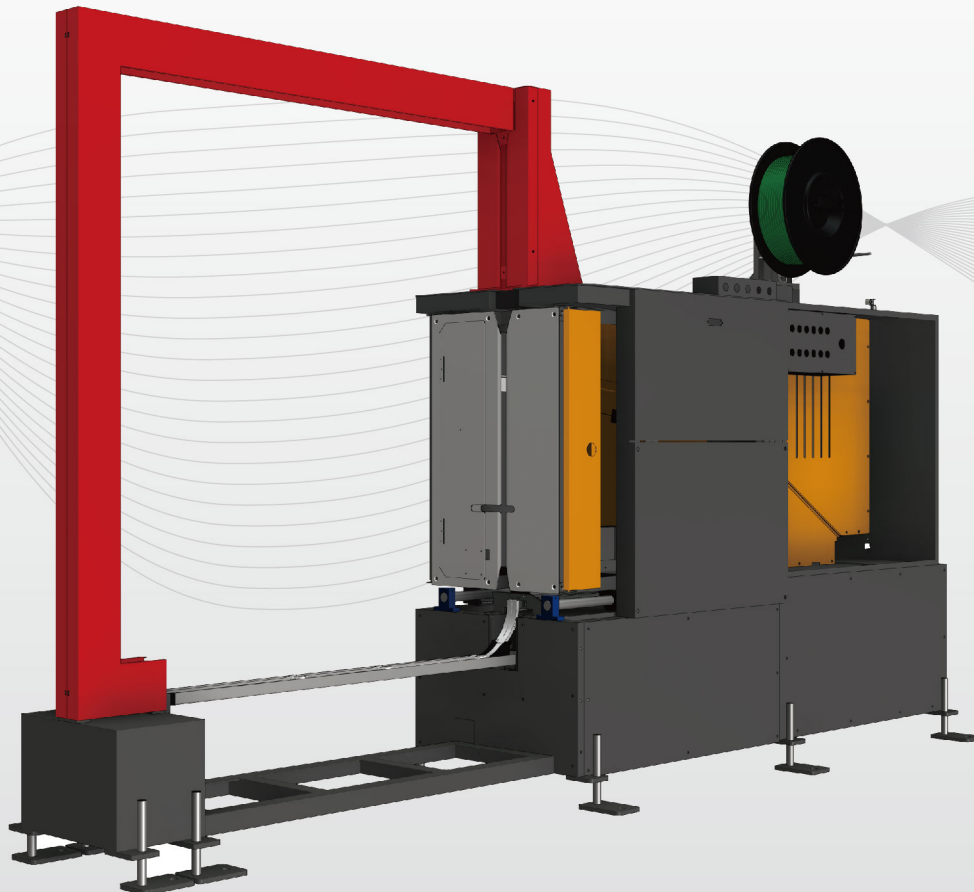

PW-3864YAO