

PACKWAY INC.

緯華企業股份有限公司

緯華用心 精緻創新



We pack your way


Wrapping Machine Series



Film Carriage Heads

T Type

Mechanical Brake
Without sensor and
safety detection board

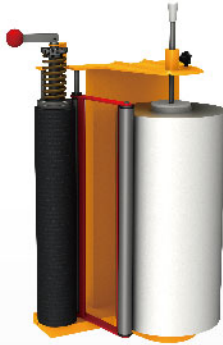

T1 Type

Mechanical Brake



T2 Type

Electromagnetic Brake




PT Type

Power Pre-Stretch
Fixed at 300%
PT1/PT2/PT3 (250%/200%/150%)



VPT Type

Variable Power Pre-stretch
100~450% adjustable

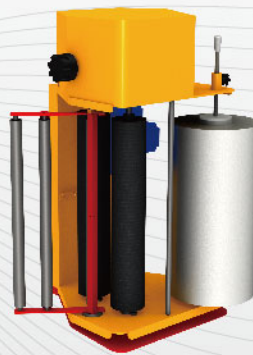

PF Type

Power Pre-Stretch
Easy-load, Short Bouncing Arm
Fixed at 300%



FIG. 1 Pallet Wrapper Series and Film Carriage Head Comparison Table


CARRIAGE		Interchangeable			Interchangeable		PF
		T	T1	T2	PT	VPT	
Economic	Me-Series	●					
Standard	RA-Series		●	●	●	●	
	RT-Series		●	●	●	●	
	R-Series		●	●	●	●	
Pallet Jack	RTJ-Series		●	●	●	●	
	RJ-Series		●	●	●	●	
Heavy Duty	RTH-Series		●	●	●	●	
	RH-Series		●	●	●	●	
Automatic	AL-Series						●



Wrapping Machine Column

The column size of this series can be designed and changed according to the wrapping articles' height.


Wrapping height

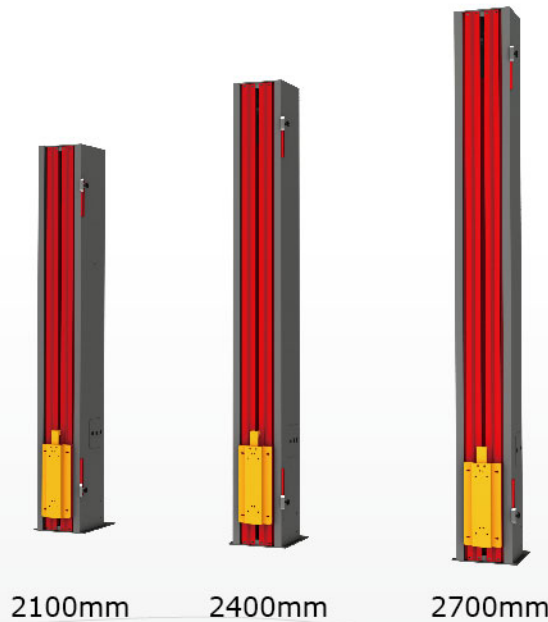

※The film carriage is equipped with chain drive, for smooth vertical movement.

Wrapping Machine Turntable

Turntable diameter

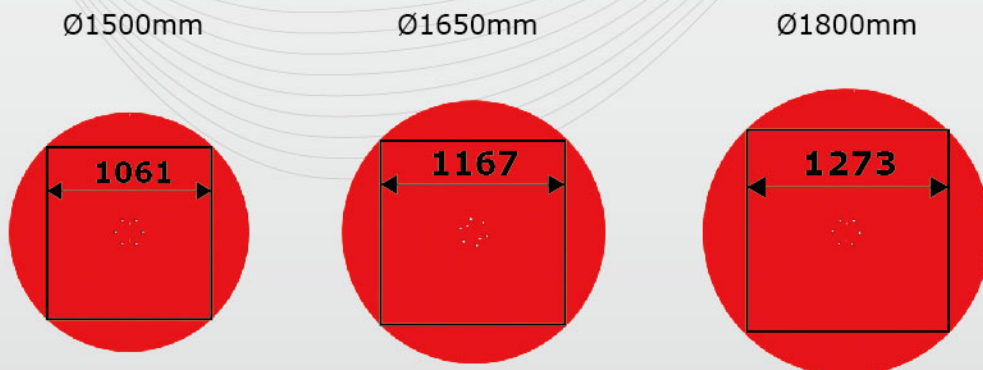

※The turntable is equipped with chain drive, for stable turning during pallet loading.

Economic Models


PW-1521ME-T Pallet Wrapping Machine

ME : Conventional & traditional switch control
T : Mechanical brake type without sensor and safety detection board

Power	1Ø, 220/230/240V, 50/60Hz
Turntable Dia.	1500 mm
Wrapping Height	2100 mm
Turntable Speed	3 ~ 10 RPM (Adjustable)
Film Carriage Speed	2~5 M/min.
Loading Weight	1500 Kgs (Max.)
Machine size	L1510 x W2587 x H2421mm

Options

- Access ramp
- Film carriage sensor

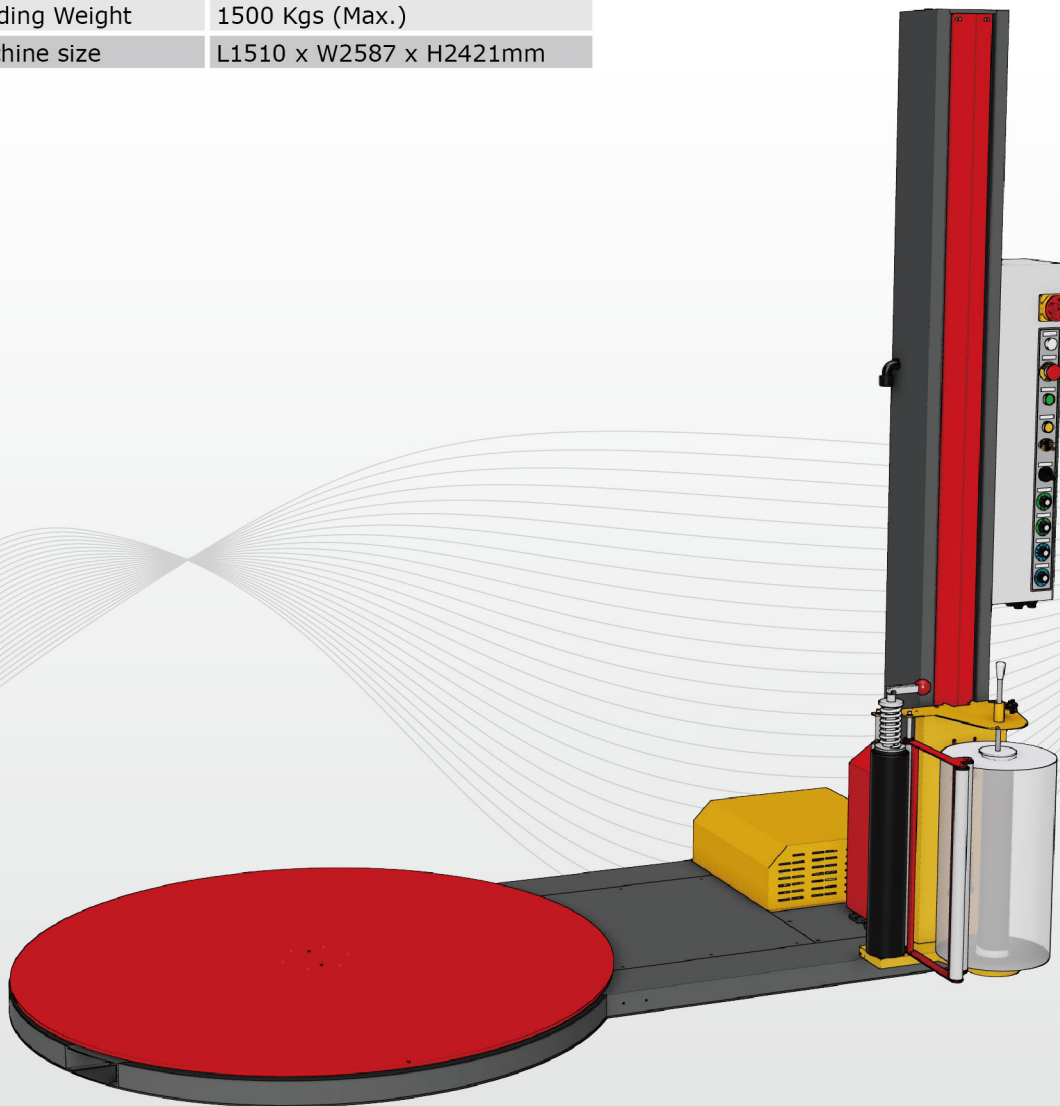

PW-1521ME-T

Features

- Inverter controls speed of motor, allowing perfect speed adjustment.
- Carriage head and turntable driven by chain for durability and stability during machines' operation.
- Automatic or Manual Mode/ Soft Start, Stop for safety



PW-1521RA-T2 Pallet Wrapping Machine

RA : PCB & traditional switch control

T2 : Electromagnetic brake type

Power	1Ø, 220/230/240V, 50/60Hz
Turntable Dia.	1500 mm
Wrapping Height	2100 mm
Turntable Speed	5 ~ 15 RPM (Adjustable)
Film Carriage Speed	2 ~ 5 M/min. (Adjustable)
Loading Weight	2000 Kgs
Machine size	L1510 x W2740 x H2421mm

Options

- Access ramp
- Turntable diameter Ø1650, Ø1800
- Wrapping height 2400mm, 2700mm
- Film carriage head choices:
T1, T2 / PT, PT1, PT2, PT3, VPT / PF



PW-1521RA-T2

Features

- Inverter controls speed of motor, allowing perfect speed adjustment.
- Carriage head and turntable driven by chain for durability and stability during machines' operation.
- Automatic or Manual Mode/ Soft Start, Stop for safety

Standard Models

PW-1521RT-T2 Pallet Wrapping Machine

RT : PCB & Membrane SW control

T2 : Electromagnetic brake type

Power	1Ø, 220/230/240V, 50/60Hz
Turntable Dia.	1500 mm
Wrapping Height	2100 mm
Turntable Speed	5 ~ 15 RPM (Adjustable)
Film Carriage Speed	2 ~ 5 M/min. (Adjustable)
Loading Weight	2000 Kgs (Max.)
Machine size	L1510 x W2705 x H2421mm

Options

- Access ramp
- Turntable diameter Ø1650, Ø1800
- Wrapping height 2400mm, 2700mm
- Weigh Scale
- Film carriage head choices:
T1, T2 / PT, PT1, PT2, PT3, VPT / PF
- Customized Wrapping Program(9 modes available)
- Punch system on PF film carriage



PW-1521RT-T2

Features

- Inverter controls speed of motor, allowing perfect speed adjustment.
- Carriage head and turntable driven by chain for durability and stability during machines' operation.
- Automatic or Manual Mode/ Soft Start, Stop for safety



PW-1521RTJ-T2 Pallet Jack / Horse Shoe

RTJ : PCB & Membrane SW control

T2 : Electromagnetic brake type

Power	1Ø, 220/230/240V, 50/60Hz
Turntable Dia.	1500 mm
Wrapping Height	2100 mm
Turntable Speed	5 ~ 15 RPM (Adjustable)
Film Carriage Speed	2 ~ 5 M/min. (Adjustable)
Loading Weight	1200 Kgs (Max)
Machine size	L1800 x W2502 x H2432mm

Options

- Turntable diameter Ø1650, Ø1800
- Wrapping height 2400mm, 2700mm
- Film carriage head choices:
T1, T2 / PT, PT1, PT2, PT3, VPT / PF
- PLC control



PW-1521RTJ-T2

Features

- Inverter controls speed of motor, allowing perfect speed adjustment.
- Carriage head and turntable driven by chain for durability and stability during machines' operation.
- Automatic or Manual Mode/ Soft Start, Stop for safety


PW-1521R-T2 Pallet Wrapping Machine

- R : PLC & traditional switch control
- T2 : Electromagnetic brake type

Power	1Ø, 220/230/240V, 50/60Hz
Turntable Dia.	1500 mm
Wrapping Height	2100 mm
Turntable Speed	5 ~ 15 RPM (Adjustable)
Film Carriage Speed	2 ~ 5 M/min. (Adjustable)
Loading Weight	2000 Kgs (Max)
Machine size	L1510 x W2705 x H2421mm

Options

- Access ramp
- Turntable diameter Ø1650, Ø1800
- Wrapping height 2400mm, 2700mm
- Film carriage head choices:
T1, T2 / PT, PT1, PT2, PT3, VPT / PF
- Weigh Scale
- Punch system on PF film carriage

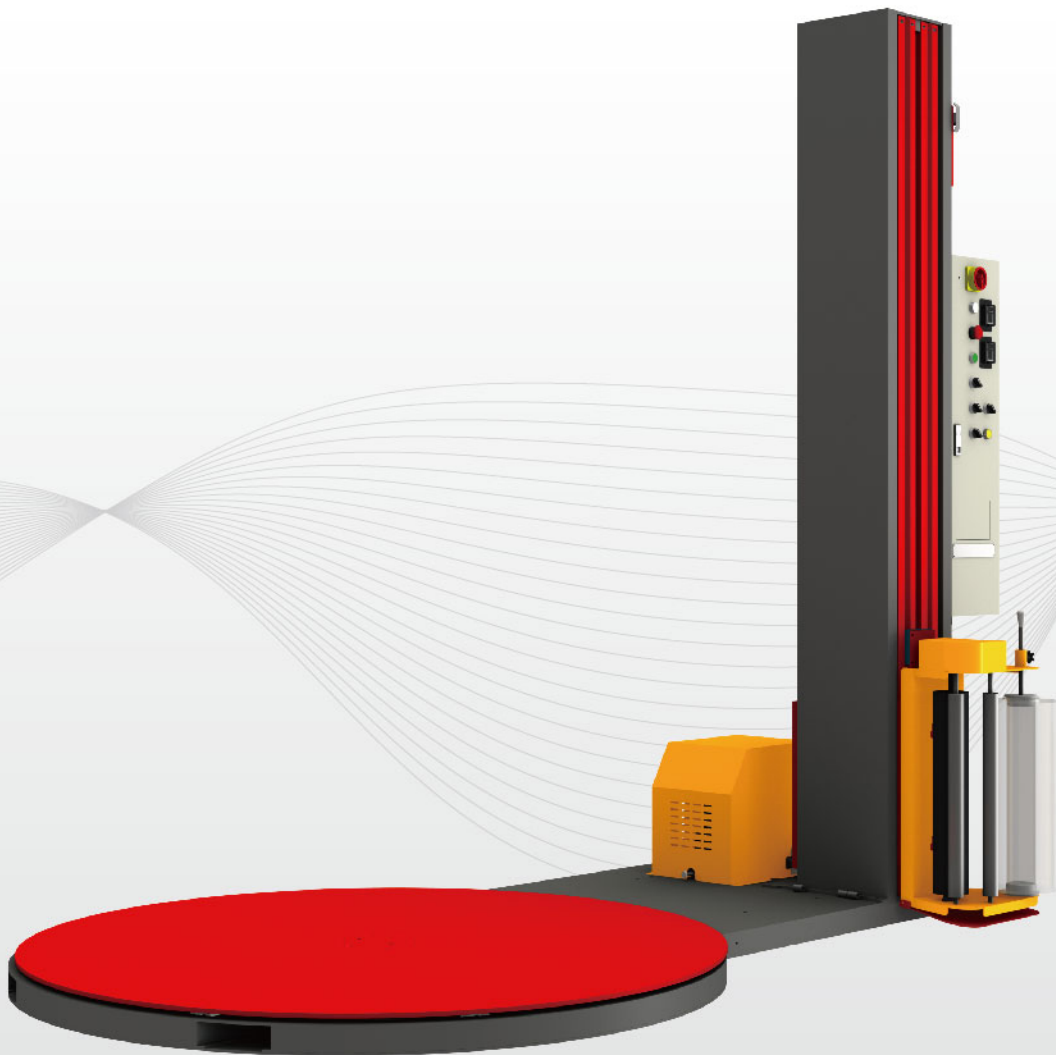

PW-1521R-T2

Features

- Inverter controls speed of motor, allowing perfect speed adjustment
- Film Carriage and turntable driven by chain for durability and stability during machines' operation
- Automatic or manual mode / soft start, stop for safety
- Film tear off switch (electromagnetic brake only)



Heavy Duty Model

PW-1721RTH-T2 Pallet Wrapping Machine -Heavy Duty

RTH : PCB & Membrane SW control with High Profile

T2 : Electromagnetic brake type

Power	1Ø, 220/230/240V, 50/60Hz
Turntable Dia.	1723 mm
Wrapping Height	2100 mm
Turntable Speed	5 ~ 15 RPM
Film Carriage Speed	2 ~ 5 M/min
Loading Weight	4000 Kgs (Max.)
Machine size	L1646 x W2827 x H2614mm

Options

- Wrapping height 2400mm, 2700mm
- Film carriage head choices:
T1, T2 / PT, PT1, PT2, PT3, VPT / PF
- Weigh Scale
- PLC control



PW-1721RTH-T2

Features

- Inverter controls speed of motor, allowing perfect speed adjustment
- Film Carriage and turntable driven by chain for durability and stability during machines operation
- Automatic or manual mode / soft start, stop for safety
- Manual middle wrap

Fully Auto Model

PW-1621AL-PF Automatic Pallet Wrapping Machine -Low Profile

AL : PLC & HMI touch screen

PF : Power pre-stretch fixed at 300% with Easy-load and Short Bouncing Arm type

Power	1Ø, 220/230/240V, 50/60Hz
Turntable Dia.	1650 mm
Wrapping Height	2100 mm
Turntable Speed	5 ~ 15 RPM
Film Carriage Speed	2 ~ 5 M/min. (Adjustable)
Loading Weight	2000 Kgs
Machine size	L2065 x W2855 x H2422mm

Options

- Photocell sensors for clampper damage prevention



PW-1621AL-PF

Features

- Automatic film clamping, cutting and wipe
- Soft start/stop
- Manual/Auto mode
- User friendly design remote control



Rotating Arm Model

PW-1921SH-T2 Rotary Arm Wrapping Machine

SH:Rotary arm

T2:Electromagnetic brake type

Power	1Ø, 220/230/240,50/60Hz
Package size	L1200xW1200xH2100mm(including Pallet)
Wrapping Height	2100 mm
Rotating Speed	3 ~ 10 RPM(Adjustable)
Film Carriage Speed	1.6 ~ 4.8 M/min.
Machine size	L3096 x W3413 x H2995mm

Options

- Automatic film clamping, cutting and wipe
- Power pre-stretch film carriage
- Safety Fence



PW-1921SH-T2

Features

- Inverter controls speed of motor,allowing perfect speed adjustment
- Suitable for pallet jack or forklift use
- No loading weight limited
- Soft start / stop
- Safety Device

Power Chain Model

PW-1223ARD Fully-auto Pallet Wrapping Machine - Heavy Duty

ARD : PLC & HMI touch screen

Power	3Ø, 220/380/415/440V
Turntable Dia.	2000 mm
Wrapping Height	2300 mm
Turntable Speed	3 ~ 15 RPM
Film Carriage Speed	2 ~ 5 M/min
Conveyor Speed	8 M/min.
Loading Weight	2000 Kgs (Max.)
Working Height	800mm
Machine size	L2200 x W3040 x H3228mm

Options

- Top press platen
- Safety fence
- Customized loading weight



PW-1223ARD

Features

- Automatic film clamping, cutting and wipe
- Manual/Auto mode
- Turntable with conveyor
- Soft start/stop
- Colored touch screen for easy operation



Power Driven Models

PW-1821AR + PW-1818FC Fully-auto Pallet Wrapping Machine


AR : PLC & HMI touch screen

FC : Top sheet dispenser

Power	3Ø, 220/380/415/440V 50/60Hz
Turntable Dia.	1800mm
Wrapping Height	2100mm
Turntable Speed	5 - 15 RPM
Film Carriage Speed	2 - 5 M/min
Top Sheet Size	W 1800 x D 1800
Loading Weight	1500KGS
Machine size	L3000 x W1800 x H2711 mm

Options

- Safety fence
- Special spec. made on request
- Infeed/outfeed conveyor

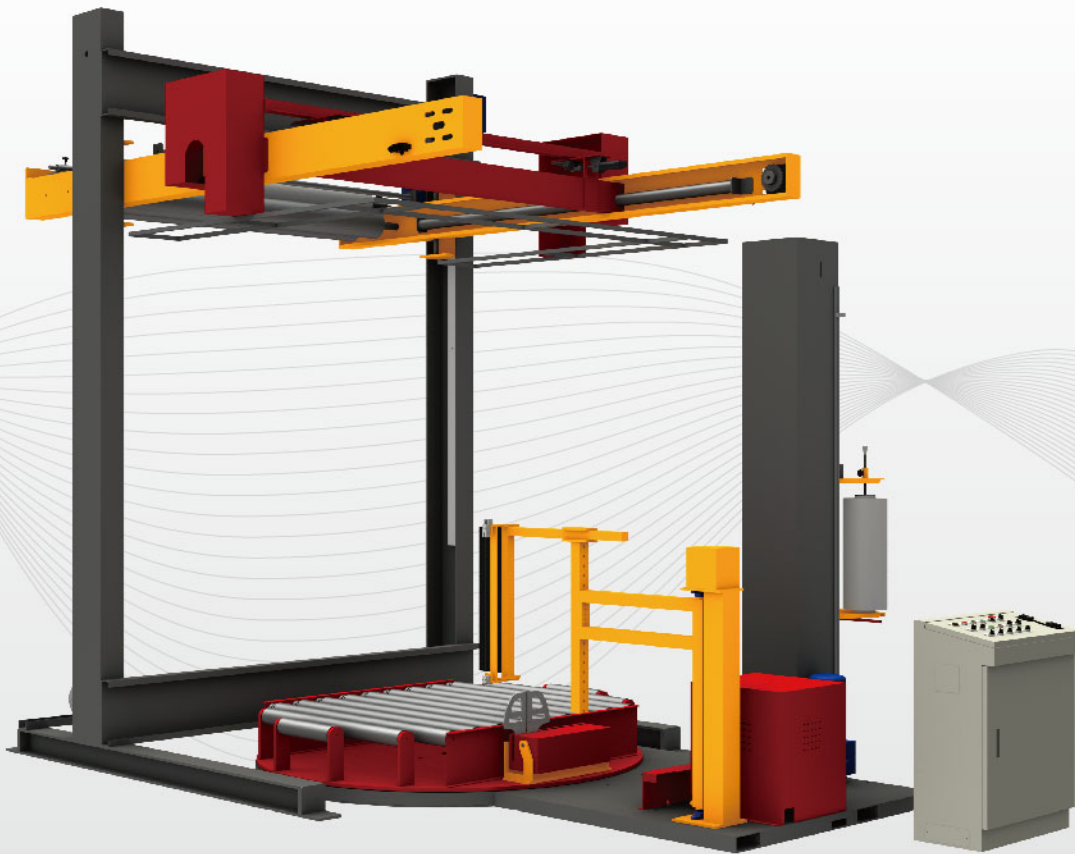

PW-1821AR + PW-1818FC

Features

- Automatic film clamping, cutting and wipe
- Manual/Auto mode
- Turntable with conveyor
- Low working height
- Soft start / stop
- Colored touch screen for easy operation

PW-2021ASRT


Fully-auto Pallet Wrapping Machine - Heavy Duty

ASRT : PLC & HMI touch screen

Power	3Ø, 220/380/415/440V 50/60Hz
Turntable Dia.	2000mm
Wrapping Height	2100mm
Turntable Speed	3 - 15 RPM
Film Carriage Speed	2 - 5 M/min
Loading Weight	3000KGS
Machine size	L2220 x W3110 x H3094mm

Options

- Special spec. made on request
- Loading weight 4000KGS made on request

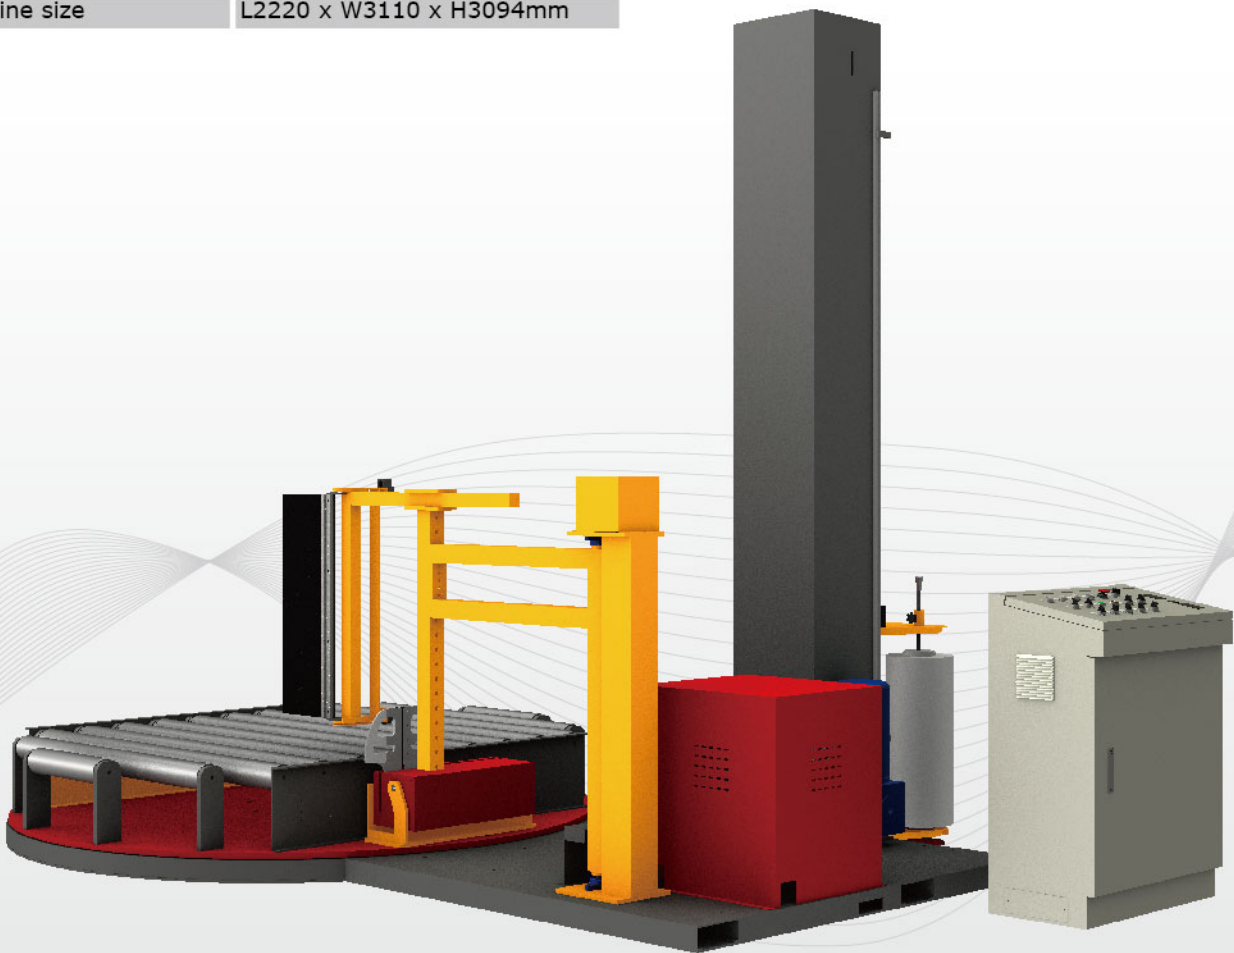

PW-2021ASRT

Features

- Automatic film clamping, cutting and wipe
- Manual/Auto mode
- Turntable with conveyor
- Low working height
- Soft start / stop
- Colored touch screen for easy operation



Fully-auto Rotating Arm Models


PW-1224AHM Fully-auto Pallet Wrapping Machine

AHM : PLC & HMI touch screen

Power	3Ø, 220/380/415/440V 50/60Hz
Wrapping Height	2400 mm
Rotating Dia.	2100 mm
Rotating Arm Speed	3 ~ 15 RPM
Film Carriage speed	1.4-3.5 M/min
Machine size	L2200 x W4720 x H4152mm

Options

- Safety fence
- Infeed/outfeed conveyor
- Rotating arm Speed for 6~30RPM

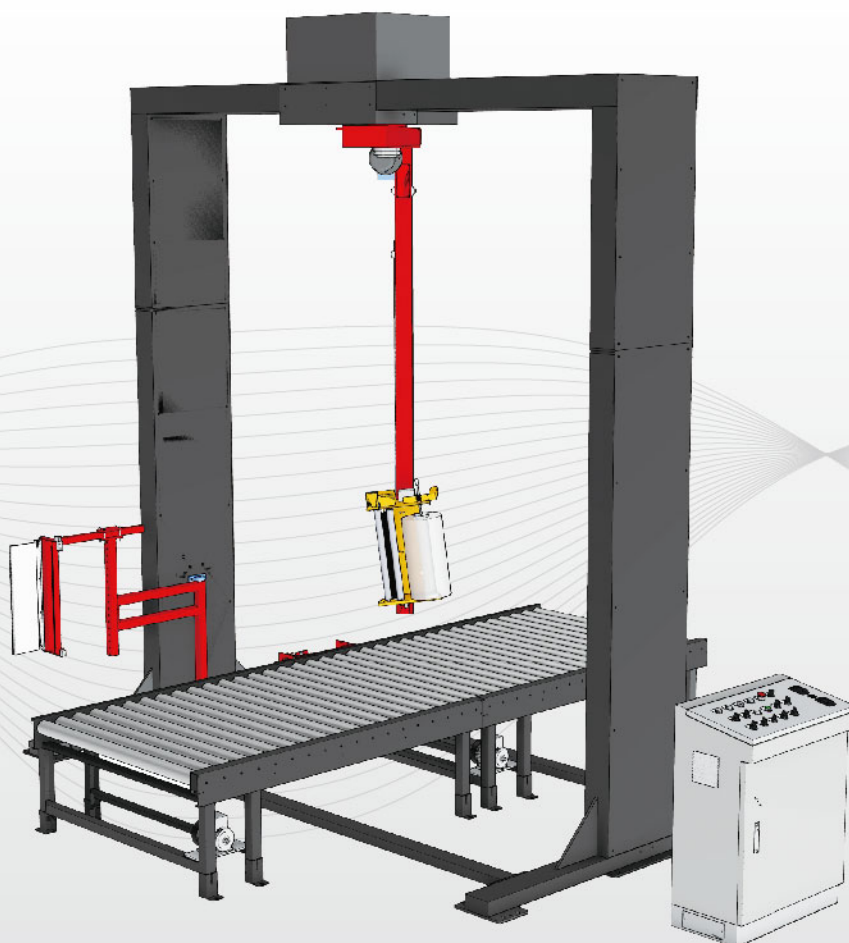

PW-1224AHM

Features

- Adjustable arm rotation speed by Inverter
- Adjustable film carriage's speed by Inverter
- Manual/Auto mode
- Soft start/stop

PW-1225AHMF Fully-auto Pallet Wrapping Machine


AHMF : PLC & HMI touch screen

With rotating arm and top sheet dispenser

Power	3Ø, 220/380/415/440V 50/60Hz
Wrapping Height	2500 mm
Rotating Dia.	2100 mm
Rotating Arm Speed	6 ~ 30 RPM
Film Carriage Speed	3.2 ~ 8 M/min.
Top Sheet Size	W1800 x D1800mm
Machine size	L2140 x W6016 x H4417mm

Options

- Safety fence
- Infeed/outfeed conveyor

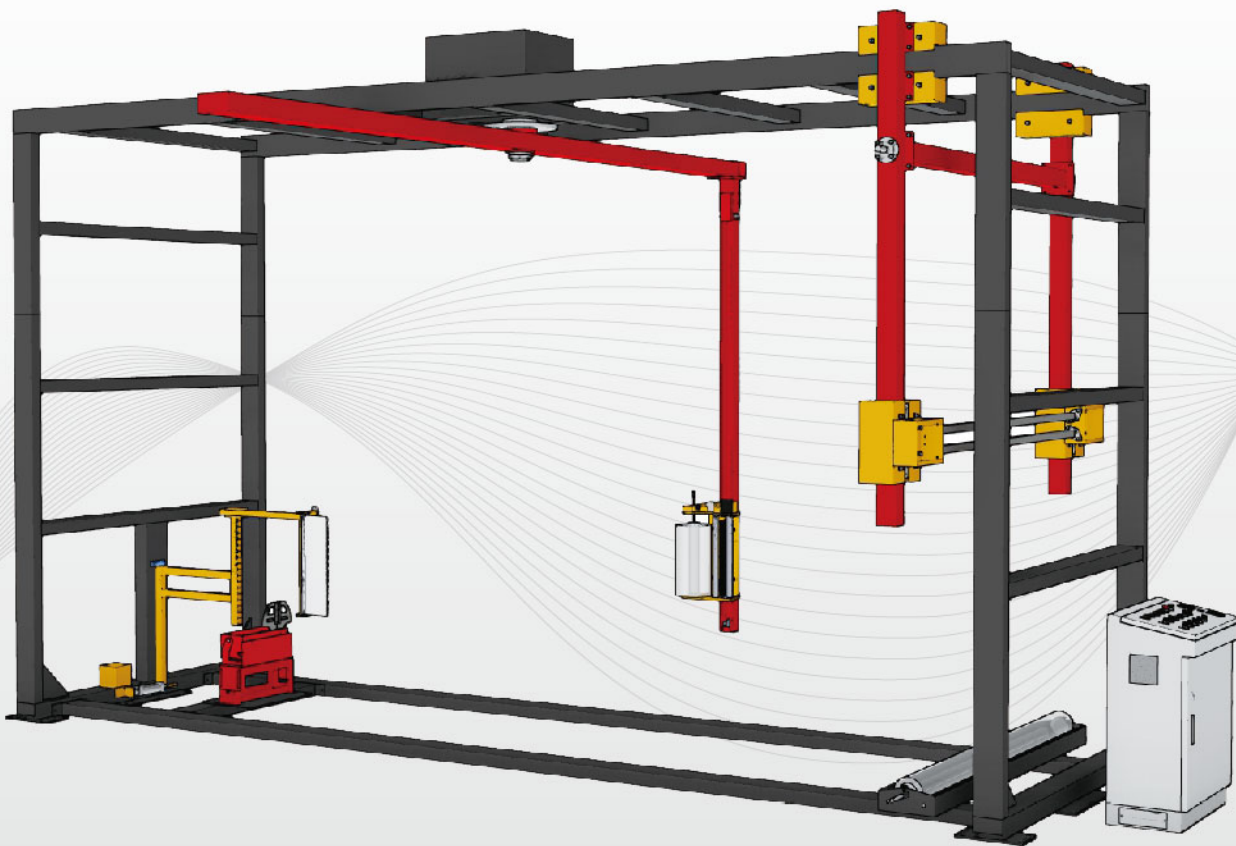

PW-1225AHMF

Features

- Adjustable arm rotation speed by Inverter
- Adjustable film carriage's speed by Inverter
- Manual/Auto mode
- Soft start/stop
- With top sheet dispenser



Other Special Models

PW-0610LG Luggage Wrapping Machine


Power	1Ø, 220V/230V/240V, 50/60Hz
Turntable Dia.	600mm
Wrapping Height	550mm
Turntable Speed	3 ~ 14 R.P.M
Loading Weight	100KGS
Machine size	L1440 x W600 x H1351mm

Options

- Customized turntable diameter



PW-0610LG

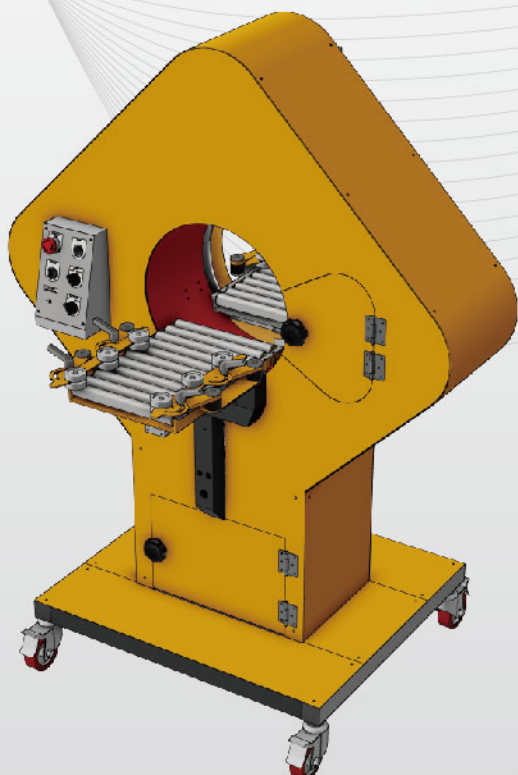

PW-400AH

PW-400AH Horizontal Wrapping Machine

AH:Horizontal wrap

Power	1Ø, 220/240, 50/60 Hz
Rotating Speed	150 RPM (Adjustable)
Film Carriage	Mechanical Brake (T1)
Wrapping Dimension	W200xH85~200mm
Working Height	964mm
PE Film	ID76mmxOD203mmxW51~127mm
Loading Weight	2000 Kgs (Max.)
Machine Size	L1223xW1006xH1666mm

Options

- Non-power Conveyor or Powered Conveyor
- Top press
- Customize Working Dimension on request

Other Special Models

PW-2413VH Semi-auto Pallet Wrapper


VH : PLC controls

For roll type products

Power	3Ø, 220/380/415/440V, 50/60 Hz
Turntable	2413 mm
Working Height	1350 mm
Roller Size	O.D.265Ø, Shaft 50Ø, length 2600mm
Film Carriage	Power Pre-stretch (PT)
Loading Weight	2000 Kgs (Max.)
Machine size	L2732xW1642xH2421mm

Options


- Safety fence
- Customized loading weight

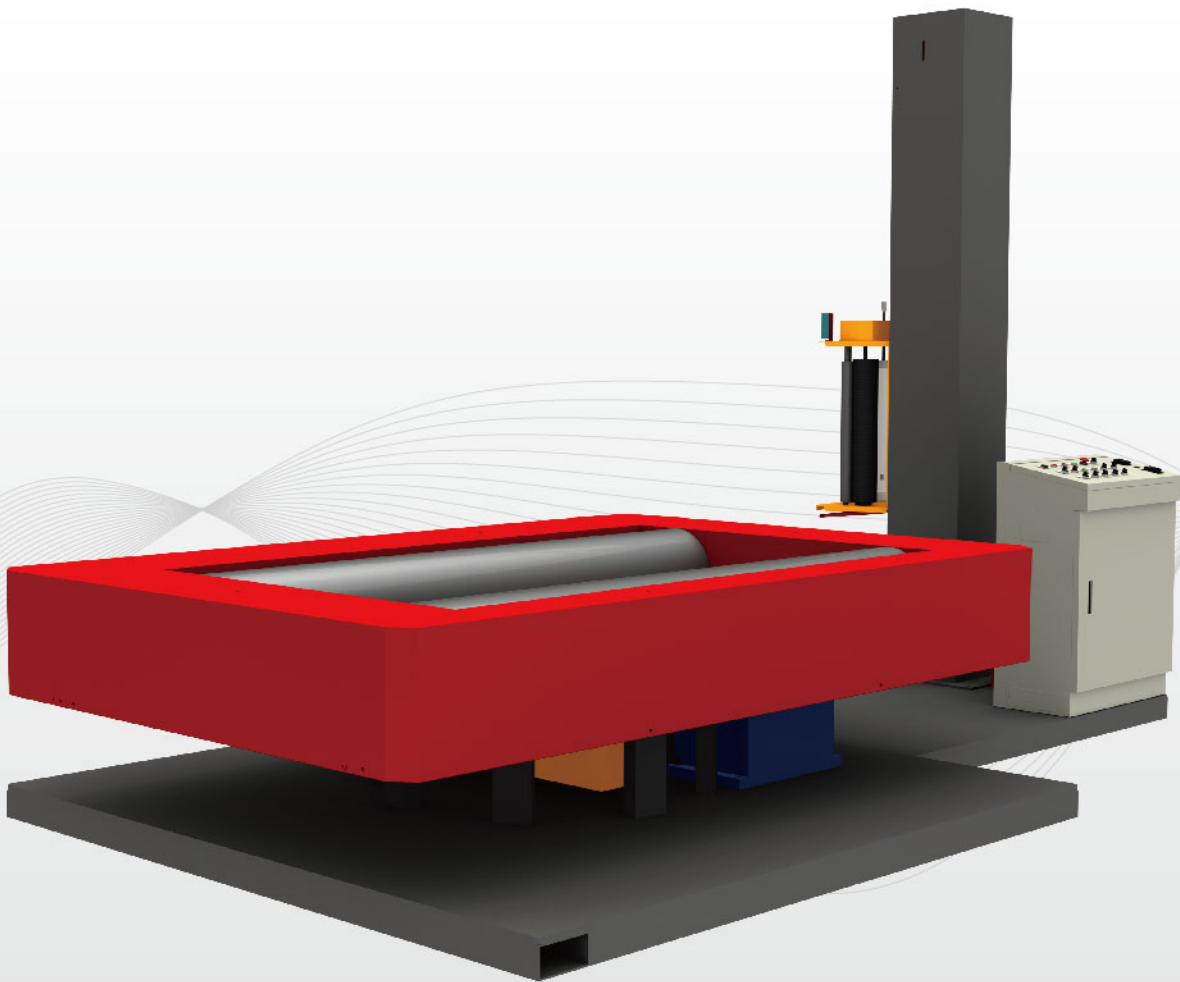

PW-2413VH

Features

- Inverter controls speed of motor, allowing perfect speed adjustment.
- Carriage head and turntable driven by chain for durability and stability during machines' operation.
- Automatic or Manual Mode/ Soft Start, Stop for safety

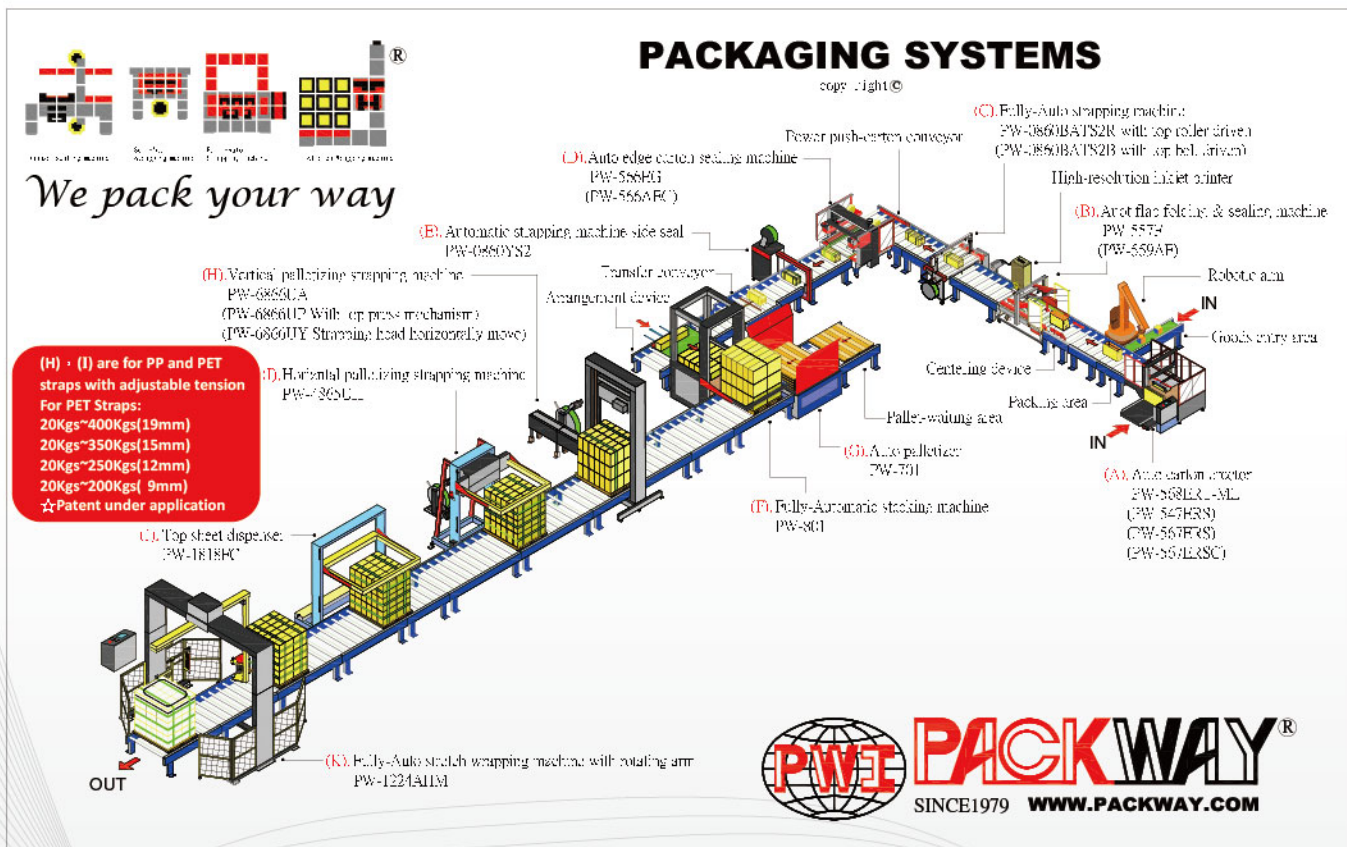

PW-0860BAT+PW-557FB+PW-53+PW-568ERT



PW-4865CLP+S6



Flexible Pick & Place with Sealing System



PW-553S+PW-0840AS2+PW-801



I am from Taiwan

🏠 56, 35th Road. Taichung Industrial Park,
Taichung 407, TAIWAN, R.O.C
☎ +886 4 2359 1858
📠 +886 4 2359 7489
🌐 www.packway.com